

Record Easy Sealer

DATASHEET SAFE • SUSTAINABLE • STRONG

Semi-Automatic Case Sealer

The **Record Easy Sealer** is a semi-automatic case sealing machine designed and engineered specifically for medium fixed sized boxes. This machine is the ideal case sealing machine for a variety of industries like food and beverage, chemical, clothing, textiles, electronics, furniture, and metal containers.

Practical - Seals upper & lower flaps of cardboard cases **Quality Build** - Best-In-Class components with or cartons SIEMENS electric



Added Protection - Lockable electric isolation switch **New feature** - Top taping head removable

Taping Heads - Available with K11 or K12 taping heads **Improved Design** - Quick release Taping Heads (Top

Faster - 30 m/min belt conveyor speed option available & Bottom – No tools required)

Ecological - energy saving option available **CE compliant** - Engineered and produced in Italy according to EU safety standards

MACHINE DIMENSIONS

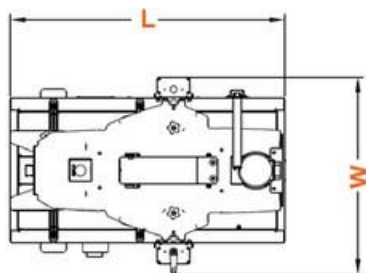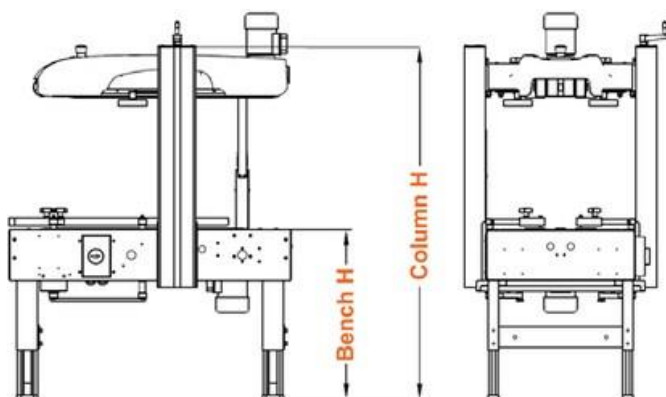

Machine Dimensions	Min (mm) Max (mm)	
	H Column	1.190
H Bench	485	825
W	770	770
W Bench	570	-
L	1.080	-

Standard Power Supply	
380/415V - 50Hz - 3ph	
440V - 60Hz - 3ph	
Amps	1,08
Power kW	0,26
Phase 3Ph	+N + PE

DATASHEET

Technical Data


Belt position	Top + Bottom
Box Size	Medium
Min / Max box weight	0.5 - 32 kg
Default Taping Head	K11 for 2" = 50 mm
Alternative Taping Heads	K12 for 3" = 75 mm
Power Consumption (std.)	0,26 kw
Air Consumption (NL/Cycle)	No air consumption
Operator Side	Left (std.) / Right
Tape width (mm)	50 (std.) / 75
Tape Leg (mm)	70 (std.) / 50 / 30
Ingress Protection Code	IP54
Ambient Operating Temperature	+5° / +40° C
Maximum level of noise	Depending on tape quality

Features

Removable Top Taping-Head	
Removable Bottom Taping-Head	•
Adjustable Tape Leg	•
Pre-Installed & Easy-To-Mount	•
Adjustable Tape Contact Pressure	•
Autom. Box Format Setting	•
Flap Folding Function	-
Belt Speed Selection	-
Fully Automatic Operation	-
Taping-Logic on board	-


MORE MACHINE DIMENSIONS

Length x Width	1.080 x 770
Workbench Width	570
Height H (std. legs)	1.190 – 1.530
Height H1 (std. legs + wheels AS77)	1.300 – 1.640
Height H2 (opt. legs AS80)	1.350 – 1.685
Height H3 (opt. legs AS80 + wheels AS77) Workbench	1.460 – 1.795
Height Z (std. legs)	485 – 825
Workbench Height Z1 (std. legs + wheels AS77)	595 – 935
Workbench Height Z2 (opt. legs AS80)	645 – 980
Workbench Height Z3 (opt. legs AS80 + wheels AS77)	755 – 1.095

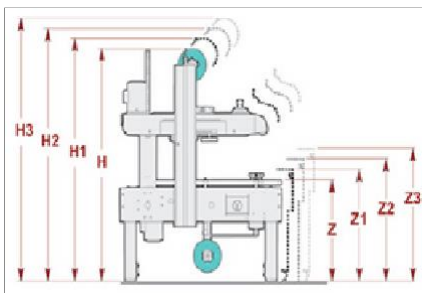


SPECIAL VERSIONS

Special Versions according to individual application and safety requirements are possible on request.




BOX DIMENSIONS & PRODUCTIVITY



*140 mm with 50 mm taping head K11
170 mm with 75 mm taping head K12

Box Dimensions	L (mm)	W (mm)	H (mm)
Min.	150	140**	90*
Max.	∞	500	500

** 90 mm high box manageable with 30 mm tape leg
100 mm high box manageable with 50 mm tape leg
120 mm high box manageable with 70 mm tape leg




Max. production capacity:
Up to 1200* BPH

*Based on the shortest processible box length and provided an optimum continuous box infeed by the operator.

Base Material	PVC / OPP / PET / Paper*
Adhesive Type	Solvent / Hot Melt / Acrylic
Special Tape	Filament-Tape** / Safety-Seal-Tape***

*with limitations **special tape cutting blade required ***need of a test might be necessary



K11R / K12R	
A	Max. 410 mm
B	50 / 75 mm
C	76 mm

BOX REQUIREMENTS

Quality result of the taped box depends on the general box quality and dimensional accuracy, as well as the quality of tape used.

Box Types: FEFCO 0201 – RSC

[other types may be possible as well]

Adverse Impact Factors	Underfilling	Overfilling	Weak Boxes

OPTIONS & ACCESSORIES

- Operation side "Right" (std. "Left")
- Special cutting blades filament-tape
- Taping Head for 75 mm width
- Power Supply 220/230V – 50hz – 1ph
- Higher Legs
- Casters / Wheels
- Fix / Extendable Roller Conveyors
- Safety fences
- 30 m/min belt speed (std. 22)
- Energy Saving Kit
- End/Break Tape Device

MORE DETAILS

Further information can be found on our website



MPTPACKAGING LTD
Record Packaging Systems

Unit 41, Stretford Motorway Estate, Manchester, UK, M32 0ZH Unit 69,

Premier Business Park, Ballycoolin Road, Dublin, IRE, D11 EP11

Tel.: +44 161 864 3971 - Recordpackaging.com
sales@recordpackaging.com

