

Infeed loading conveyor
 2600 mm long

7" color touch screen

- ⚙️ Steel frame with **AISI 304** stainless steel guards;
- ⚙️ **Longitudinal sealing unit** consisting of two pairs of wheels: driving and sealing
- ⚙️ **transversal sealing unit** with "box motion" movement and electronic closing of 350mm wide jaws
- ⚙️ **Self-Centring reel system** to enable quick positioning of film
- ⚙️ **Motorised rubber-coated film** driving roller
- ⚙️ **Product transport belt** under longitudinal sealing unit
- ⚙️ **Photocell for printed film**
- ⚙️ Standard **spare parts kit**
- ⚙️ **Safety guards** in transparent shockproof plastic material.
- ⚙️ **Adjustable forming box microswitch** for end of film.


Outfeed conveyor
 1000 mm long

Find Video
 Attached Here



Product length	min 50 mm	max 520 mm
Product width	min 10 mm	max 350 mm
Product height	min 1 mm	max 200 mm
Reel holder width	900 mm on demand 1000 or 1200 mm	
Mechanical speed	min 10	max 80
Weight	1850 kg	
Power supply	5.4 Kw	

Type of packaging

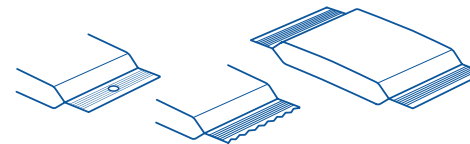

- ⚙️ Motorization by means of **5 independent Brushless motors**
- ⚙️ Mechanical speed **80 rpm**
- ⚡ Voltage **400V / 3 phase Earth + Neutral, 50Hz**
- CE Machine conforms to **CE regulations**

