


FM77A EVO-A

The Replay EVO range includes a series of basic chamber wrapping machines, while not sacrificing the typical quality of the products by Record Packaging. Thanks to the excellent value for money, offering new cutting-edge systems at affordable prices, it is the most competitive proposition among all our series of chamber machines.

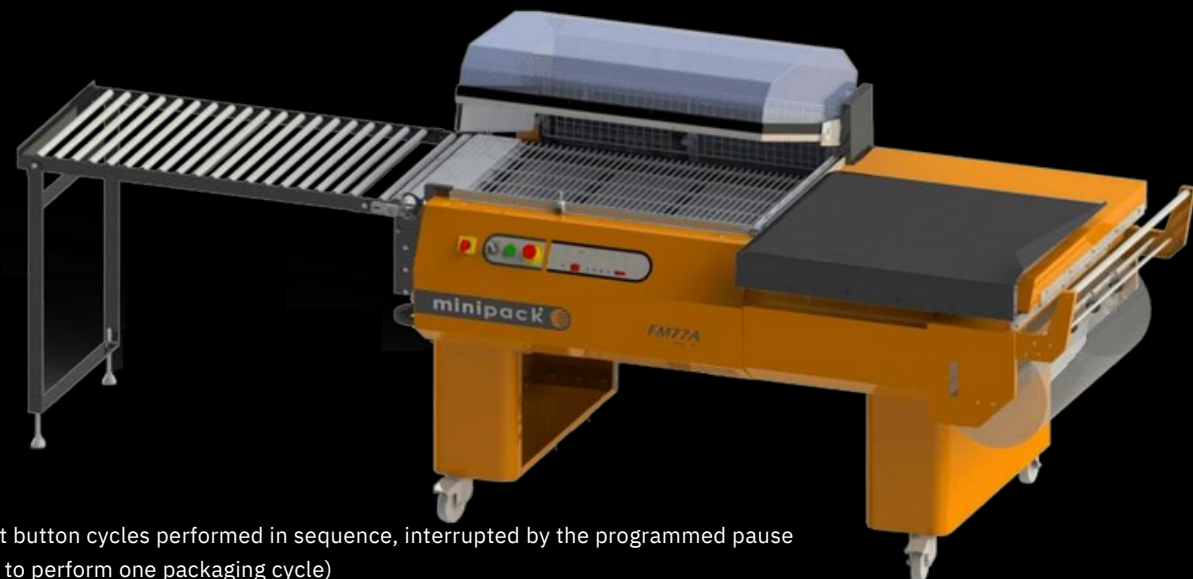

Technical Solutions

- Option of having an 'Automatic' work cycle (press the start button cycles performed in sequence, interrupted by the programmed pause interval) and a 'Manual' work cycle (press the start button to perform one packaging cycle)
- Automatic lid opening, product ejection
- Frontal control interface: intuitive programming
- Standard sealing bars liquid cooling system: increased productivity and improved sealing
- Innovative upper hood fixing, easier maintenance.
- Safety control on sealing blades: safer machine
- Roll support with bigger diameter (300 mm)
- Packaging plate independent from roll support: suitable for the packaging of small products with the same film roll
- Innovative micro puncher: continuous and accurate perforation
- Double display: 2 digitals for programs and settings and 4-digit as piece counter
- 6 programs digital control panel easy to be used
- Counter pieces included: more complete equipment
- Power board access with frontal door
- Higher screened plate: more protection of the heating elements
- More powerful fan motor: superior shrinking performance
- Extra safety thermostat on the heating elements: safer machine
- New rubber support without glue
- Hood safety system: Greater safety for the operator

Technical Features

Electrical power supply	200V 50/60Hz 3Ph 208V 60Hz 3Ph 230V 50Hz 3Ph 400V 50Hz 3Ph
Maximum power installed	6,0 kW (200V) 7,9 kW (208V) 7,5 kW (230/400V)
Maximum current	20 A (200V) 24 A (208V) 21 A (230V) 12 A (400V)
Hourly production	0-400
Useful dimensions of sealing bars	840x590 mm
Maximum reel dimensions (Ø x length)	Ø300x800 mm
Maximum product dimensions	800x500x200 mm
Work surface height	940 mm
Machine dimensions (open hood)	3120x1000x1480 mm
Machine dimensions (closed hood)	3120x1000x1180 mm
Machine weight (net / gross)	286/338 kg
Machine color	RAL2004 peeled
Packaging flat color	RAL7016 peeled

Layout Drawing

